



# Technical Specification | Supermarket Pumps Cold Cabinet

Part No: Top Inlet FP2119 / Side Inlet FP2120

ASPEN-5/09

## Dimensions:

Height: 100mm  
Width: 585mm  
Depth: 400mm  
Weight: 7.8kg

## Power Supply:

Thermally protected 230V motor

## Electrical Connections:


Brown: Live  
Blue: Neutral  
Green/yellow: Earth  
2 x Black: Safety switch

## Other Features:

- Tank capacity: 11 litres
- High level safety switch
- Strainer to catch debris
- 50mm inlet hole to lid 10mm outlet hose connection
- Side inlet option available
- Stainless steel tank/cover
- Hard-wired
- Water temp: 0°C to 75°C
- 3 floats & relay

## Performance:

- Water flow rate:  
225 litres per hr max
- Recommended head:  
35 metres max

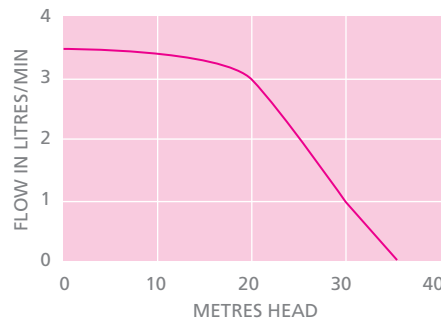

## Service Guide:

**IMPORTANT:** Flush the pump through with anti-bacterial wash and clean both filters every 6 months or more often if required, to avoid sludge build-up. Replacement anti-bacterial "Stayclean" strips are recommended and are available from Aspen Pumps.



**A simple yet very effective solution for the removal of water from supermarket retail refrigeration units.**

The Retail Refrigeration pumps are low in height which means they can be easily installed underneath a refrigeration unit, where direct drainage is not available and water needs to be pumped up above the ceiling and away to a suitable drain. The high capacity of the pumps also permits the draining of several units together. The pumps are operated by floats which activate sensors as the water level rises in the tank. Cleaning and maintenance of the pumps is simple, as they can be removed easily from underneath any unit.



Apex Way Hailsham  
East Sussex BN27 3WA  
T: +44 (0)1323 848842  
F: +44 (0)1323 848846  
sales@aspenspumps.com  
**www.aspenpumps.com**