



Technical Specification | Tank Pumps

Hot Water Economy

Part No: FP2092

ASPEN-5/09

Dimensions:

Height: 205mm
Width: 300mm
Depth: 150mm
Weight: 3.6kg

Power Supply:

Pump rating:
230V AC, 1.5A, 110W
Alternative voltages available

Electrical Connections:


Brown: Live
Blue: Neutral
Green/yellow: Earth
2 x Black: Safety switch

Other Features:

- 2 metres connecting cable
- Tank capacity: 4 litres
- Pre-wired safety switch 230V, 4A max
- Max. water temp: 100°C
- Fire retardant plastics
- No non-return valve supplied
- 2 inlet positions: 40mm \varnothing
- Outlet size: 10mm

Performance:

- Water flow rate:
900 litres per hour
- Maximum discharge head:
6 metres

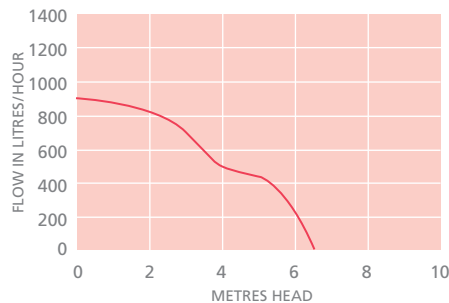

Service Guide:

Flush the pump thoroughly with anti-bacterial wash every 6 months to avoid sludge build-up in the pump housing.



The Hot Water pump is designed to collect hot water from dehumidifier drain down cycles and normal condensate water from any associated air conditioning or boiler systems.

The pump unit is built of heat resistant cyclopy and operates in the same way as the Heavy Duty tank pumps.



Apex Way Hailsham
East Sussex BN27 3WA
T: +44 (0)1323 848842
F: +44 (0)1323 848846
sales@aspenspumps.com
www.aspenpumps.com